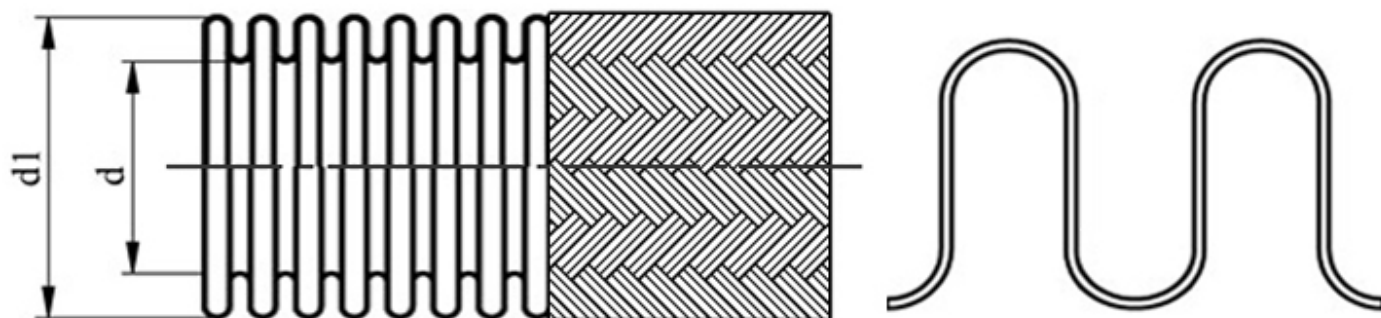


## Metalna savitljiva harmonikasta cijev

### FLEXON-N



**Tabela II: Tehnički podaci ( FLEXON N )**

DN	Unutrašnji prečnik (mm)	Spoljašnji prečnik (mm)	Min. radius savijanja (mm)		Bez opleta		Sa 1 opletom		Sa 2 opleta	
			Statički (mm)	Dinamički (mm)	Max. radni pritisak (bar)	Probni pritisak (bar)	Max. radni pritisak (bar)	Probni pritisak (bar)	Max. radni pritisak (bar)	Probni pritisak (bar)
6	6.00	9.30	25	100	4	6	100	150	160	240
10	10.00	14.00	40	150	4	6	90	135	144	216
12	13.00	17.00	50	200	3	4.5	80	120	128	192
20	20.00	27.20	70	200	2	3	64	96	102	153
25	26.00	34.00	90	200	2	3	50	75	80	120
32	32.50	42.00	110	250	1.5	2.3	40	60	64	96
40	40.80	51.00	130	250	1.5	2.3	30	45	48	72
50	51.00	63.00	175	350	1.0	1.5	28	42	44	66
65	65.30	81.00	200	410	1.0	1.5	24	36	38	57
80	80.00	96.00	205	450	1.0	1.5	18	27	28	42
100	100.00	118.00	230	560	0.8	1.2	16	24	26	39
125	125.50	147.00	280	660	0.6	0.9	12	18	20	30
150	150.00	172.00	320	815	0.6	0.9	10	15	16	24

#### Korekcionni faktor

Radna Temp. (°C)	-200	-150	-100	-50	0	20	50	100	150	200	250	300	350	400	450	500	550	600	650	700
Reducioni koeficijent kt (-)	1.0	1.0	1.0	1.0	1.0	1.0	0.95	0.83	0.75	0.69	0.65	0.61	0.58	0.56	0.54	0.53	0.52	0.34	0.19	0.10