

Metalna savitljiva harmonikasta cijev

FLEXON-S

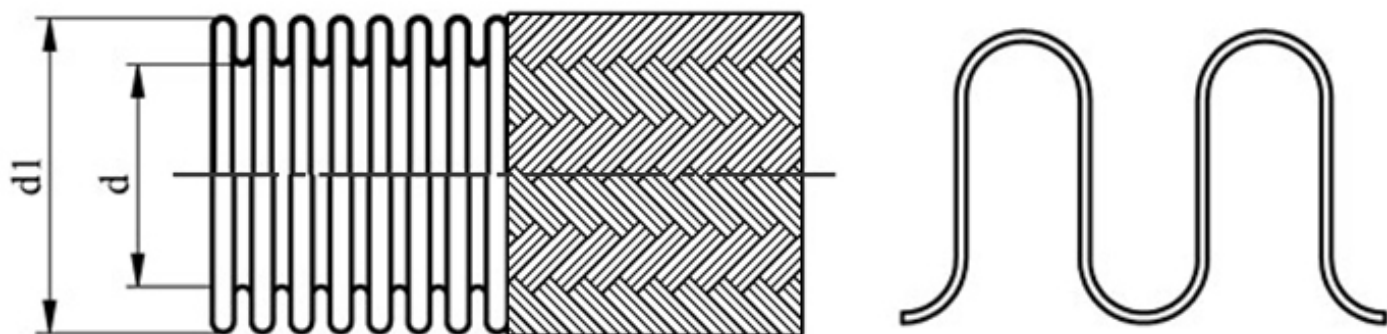


Tabela II: Tehnički podaci (FLEXON S)

DN	Unutrašnji prečnik (mm)	Spoljašnji prečnik (mm)	Min. radius savijanja (mm)		Bez opleta		Sa 1 opletom		Sa 2 opleta	
			Statički (mm)	Dinamički (mm)	Max. radni pritisak (bar)	Probni pritisak (bar)	Max. radni pritisak (bar)	Probni pritisak (bar)	Max. radni pritisak (bar)	Probni pritisak (bar)
6	6.00	9.40	19	100	4	6	100	150	160	240
10	10.00	14.10	29	115	4	6	90	135	144	216
12	12.90	17.20	34	124	3	4.5	80	120	128	192
20	19.80	27.50	53	170	2	3	64	96	102	153
25	26.00	34.40	64	195	2	3	50	75	80	120
32	32.30	42.50	79	225	1.5	2.3	40	60	64	96
40	40.60	51.50	98	255	1.5	2.3	30	45	48	72
50	50.80	64.00	120	295	1.0	1.5	28	42	44	66
65	65.10	82.00	150	345	1.0	1.5	24	36	38	57
80	80.00	97.00	180	390	1.0	1.5	18	27	28	42
100	99.80	119.00	218	450	0.8	1.2	16	24	26	39
125	125.20	148.00	255	650	0.6	0.9	12	18	20	30
150	149.70	173.50	290	815	0.6	0.9	10	15	16	24

Korekzioni faktor

Radna Temp. (°C)	-200	-150	-100	-50	0	20	50	100	150	200	250	300	350	400	450	500	550	600	650	700
Reducioni koeficijent kt (-)	1.0	1.0	1.0	1.0	1.0	1.0	0.95	0.83	0.75	0.69	0.65	0.61	0.58	0.56	0.54	0.53	0.52	0.34	0.19	0.10